

## Bulk freight wagon, 60 m<sup>3</sup>, Fanps

For the transport of gravel and crushed stone



### Advantages

- For the transport of gravel and crushed stone, with robust and proven discharge system
- Middle discharge, adjustable as well as optional lateral unloading



### Payload

Load limits		A	B	C	D	**
	S	42.0 t	50.0 t	58.0 t	69.0 t	
	120	00.0 t				

Tare weight 21,000 kg +/- 2%

### Dimensions and equipment


Length over buffers	15,640 mm
Outer axle base	12,400 mm
Track gauge	1,435 mm
Minimum radius	60 m
Axle load	22.5 t
Volume	60 m <sup>3</sup>
Number of discharge outlets	3
Width of loading opening	1,966 mm
Length of loading opening	11,224 mm
Width of discharge outlets	785 mm
Length of discharge outlets	3 x 1,040 mm
Flaps operation	manually individually over square

### Technical data





Wheelsets	22.5 t
UIC- profile	EN 15273-2 (G1-profile)
Hand brake weight	7 t

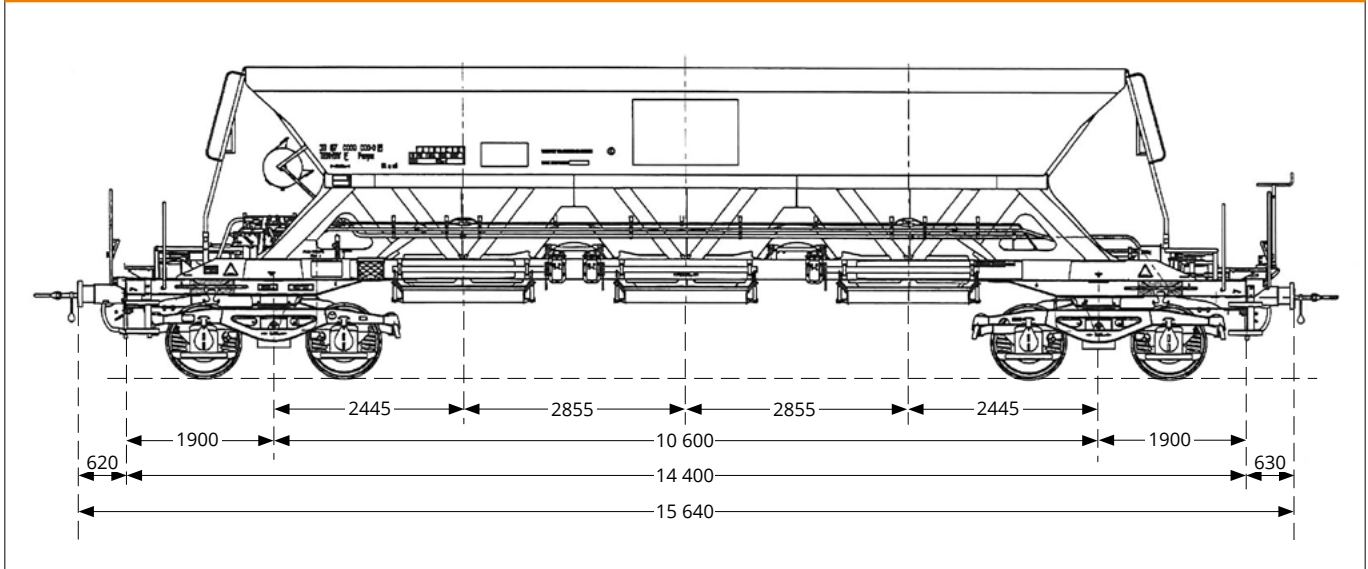

**Bulk freight wagon, 60 m<sup>3</sup>**



**Comparison of unloading options**

Central unloading			Lateral unloading
			
into underground bunker for onward processing	onto continuous conveyor below top edge of rails	onto continuous conveyor level with top edge of rails	onto mobile conveyor belt

**Possible cargo**

Crushed stone, gravel (>6 mm), rock